

Thermacore®

The Genuine. The Original.



START HERE.

Thermacore®

Premium insulated garage doors

Thermacore®

Premium construction and
maximum thermal efficiency

The Genuine. The Original.



Overhead Door presents our premium insulated
Thermacore® garage doors, featuring maximum
thermal protection.



CHOOSE YOUR DOOR

Panel style

Our Thermacore® doors feature a wood-grain embossment to enhance the appearance of your door. Choose standard panels or flush panels. Features a continuous layer of foamed-in-place polyurethane insulation sandwiched between two layers of rust-resistant, corrosion-resistant steel.



Standard panel (S) Flush panel (F)

Color

Doors are available in the colors shown or can be painted to match your home's décor.*



White Almond Sandstone Terra bronze†† Chestnut brown† Hunter green††

†Available in 190 and 490 Series only.

††Available in 190 Series only.

*Colors may vary slightly from these shown and may not be available on all individual series. See painting instructions for details.

Model series

| Series | 297 (S) 298 (F) | 194 (S) 195 (F) | 494 (S) 495 (F) |
|--------------------------------------|-------------------------|--------------------|--------------------|
| Polyurethane insulation ¹ | ● | ● | ● |
| R-value ² | 9.31 | 12.76 | 17.5 |
| U-factor ³ | 0.24 | 0.24 | 0.16 |
| Steel backing ⁴ | ● | ● | ● |
| Warranty | 20-year limited | Lifetime limited | Lifetime limited |
| Panel style | (S) Standard, (F) Flush | | |

Terminology

¹**Polyurethane insulation:** Our polyurethane foam insulation contains no CFCs or HCFCs (100% water-blown foam). Thermacore® section construction provides low U-factors for maximum energy efficiency.

²**R-value:** A standardized measure of thermal efficiency. The higher the R-value, the greater the insulating properties.

³**U-factor:** A standardized measure of the rate at which the heat passes through a material, tested in accordance with DASMA's TDS163. The lower the U-factor, the greater the insulating properties.

⁴**Backing:** Interior-side steel backing, standard on Thermacore® products, provides strength and a finished, clean appearance.

Wind load-rated door

Our WindStorm™ wind load rated system is available on selected products to meet regulations for a variety of windspeeds, ensuring your door is built to withstand varying wind conditions, including hurricane-force winds, and meet the most stringent local building codes.



CHOOSE YOUR OPTIONS

Window panels

All decorative trim windows come standard with double-strength glass.

Standard window panel



Ashton 1



Madison 1



Stockford 1



Cascade 1



Ruston 1



Stockton 1



Cathedral 1



Sherwood 1



Waterton 1



Williamsburg 4



Williamsburg 8



Full Vision



Winston 1

Carriage style window panel



Stockbridge*



Stockton*



Stockton Arch*



Somerton*



Wyndbridge Arch*

* 190 series only

Ask about glass upgrades

Want additional shatter resistance or a warm, amber tint? Ask your Red Ribbon Distributor about our optional upgrades.

Tempered glass – enhanced safety

Clear Lexan® – shatter resistant

High velocity impact glass – security option

Solar bronze – UV protection

Insulated glass – thermal efficiency

Obscure glass – light infiltration with privacy



CHOOSE YOUR OPENER

Be sure to ask about our complete line of garage openers. Your Red Ribbon Distributor will help you choose the operator that best suits your specifications and preferences.





Built better from the inside out

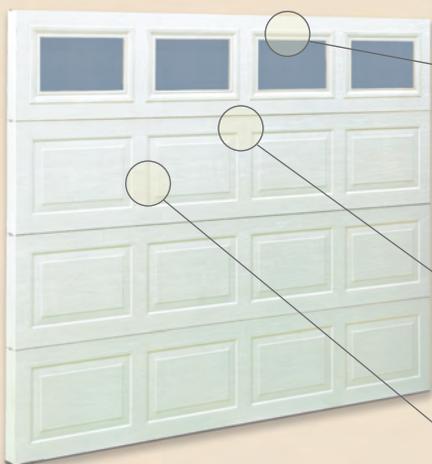

- **Thermacore® construction** 
Provides a continuous layer of foamed-in-place, CFC-free polyurethane insulation sandwiched between two layers of corrosion-resistant steel, for maximum thermal efficiency



- **Embossed wood-grain texture**
Adds beauty, sophistication and durability



- **In-between section thermal seals**
With an air infiltration rating of up to .08 cfm, seals provide superior resistance to the elements



- **Durable finish**
Hot-dipped galvanized steel with two coats of baked-on polyester paint



- **Bulb-type bottom weather seal**
Guards against wind and rain while providing a cushion when closing

The Genuine. The Original.

Since 1921, Overhead Door Corporation has not only raised the standards of excellence for the industry — we've created them. Overhead Door created the first upward-acting door in 1921 and the first electric garage door opener in 1926.

Today, our network of over 400 Red Ribbon Distributors are still leading the way with innovative solutions and unmatched installation, service and support. So look for the Red Ribbon. It's your guarantee that you're getting the genuine, the original Overhead Door.



Limited warranty

Overhead Door garage doors are backed by a limited warranty that protects against section rust-through for as long as you own your home. Also included is a one-year non-transferable, limited warranty ensuring high standards for materials and workmanship.*

* Warranties vary by model series. See warranty for full details.

The Genuine. The Original.



Overhead Door Corporation
2501 S. State Hwy., 121 Bus., Suite 200, Lewisville, Texas 75067
1-800-929-DOOR • www.OverheadDoor.com

©2012 Overhead Door Corporation. Thermacore and the Ribbon Logo are registered trademarks of Overhead Door Corporation. All other trademarks are the property of their rightful owners. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. R900-689 20M 5/12 JAR

SOLD AND DISTRIBUTED BY:

